


Self-priming double impeller pump
Bomba autocebante de doble impulsor
Pompe auto-amorçante à double turbine
Самовсасывающий насос двойной крыльчаткой

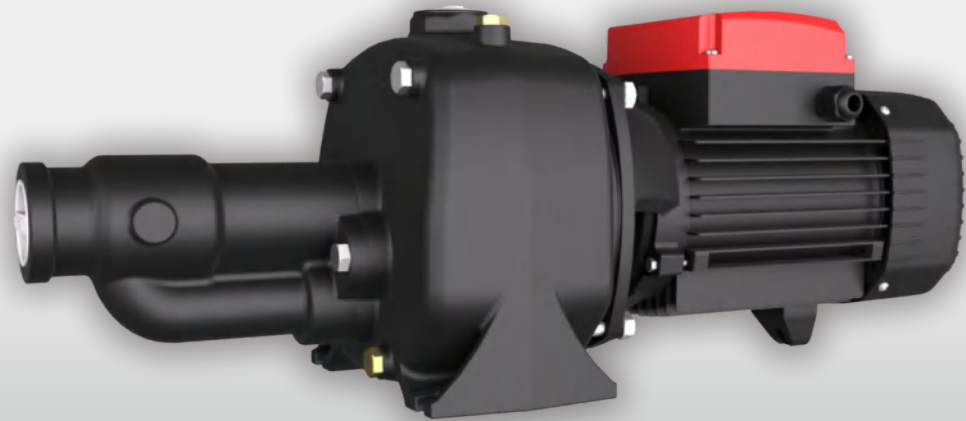


DESCRIPTION/DESCRIPCIONES/DESCRIPTION/ОПИСАНИЕ

-  ♦ Self-priming centrifugal pumps for water supply (also mixed with air).
 - ♦ Consist of an ejector unit and a centrifugal pump.
 - ♦ Company with management system certified ISO 9001.
-
-  ♦ Bombas centrifugas autoaspirantes para suministro de agua.
 - ♦ Consta de una unidad eyectora y una bomba centrifuga.
 - ♦ Empresa con sistema de gestión certificado ISO 9001.
-
-  ♦ Pompes centrifuges auto-amorçantes pour l'alimentation en eau.
 - ♦ Composé d'une unité d'éjection et d'une pompe centrifuge.
 - ♦ Entreprise avec système de gestion certifié ISO 9001.
-
-  ♦ Самовсасывающие центробежные насосы для подачи воды .
 - ♦ Состоят из эжекторного блока и центробежного насоса.
 - ♦ Компания с системой менеджмента ISO 9001.

APPLICATIONS/APLICACIONES/APPLICATIONS/ПРИЛОЖЕНИЯ

-  ♦ Liquid temperature between -10°C and +80°C
 - ♦ Ambient temperature between 0°C and +40°C
 - ♦ Max. working pressure 10 bar
-  ♦ Temperatura del líquido de -10 °C hasta +80 °C
 - ♦ Temperatura ambiente de 0 °C hasta +40 °C
 - ♦ Presión máxima en el cuerpo de la bomba 10 bar
-  ♦ Température du liquide entre -10 °C et +80 °C
 - ♦ Température ambiante entre 0 °C et +40 °C
 - ♦ Max. pression de service 10 bar
-  ♦ Температура жидкости от -10°C до +80°C
 - ♦ Температура окружающей среды от 0°C до +40°C
 - ♦ Макс. рабочее давление 10 бар

MATERIAL DESCRIPTION/DESCRIPCIÓN MATERIAL/DESCRIPTION MATÉRIEL/ОПИСАНИЕ МАТЕРИАЛА

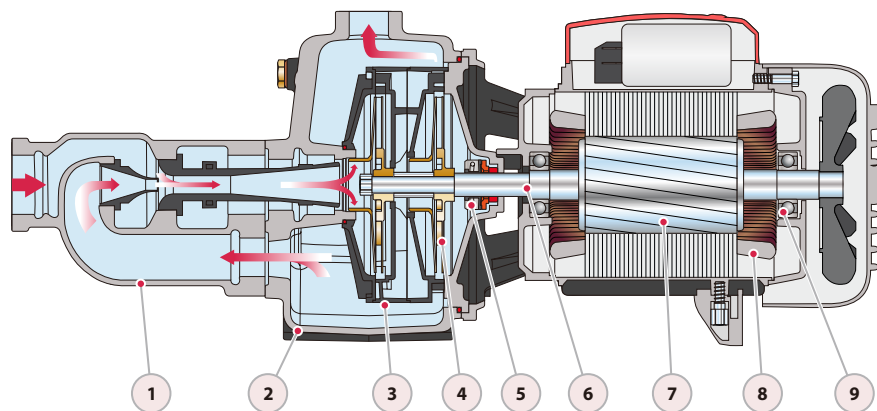


No.	Description/Descripción Description/Описание	Material/Material Matériel/Материал
1	Ejector/Eyector Ejecteur/Эжектор	Cast iron/Fundición Fonte/Чугун
2	Pump Case/Cuerpo Boitier/Корпус насоса	Cast iron/Fundición Fonte/Чугун
3	Diffuser/Difusor Diffuseur/Диффузор	Noryl/Noril Noryl/Норил
4	Impeller/Impulsor Roue/Импульсор	Brass/Latón Laiton/Латунь
5	Seal/Cierre Garniture/Тюлень	Ceramic&Carbon/Cerámica&Gráfico Ceramic&Carbon/Керамика&Углерод
6	Shaft/Eje Arbre/Вал	SUS304/Inox304 Inox304/СУС304
7	Rotor/Rotor Rotor/Ротор	Silicon Steel/Acero al Silicio Acier silicium/Кремниевая сталь
8	Wiring/Alambrado Câblage/Электропроводка	100% copper/100% cobre 100% cuivre/100% медь
9	Bearing/Cojinete Palier/Подшипник	Ball bearing/Bola rodamiento Roulement bille/Шарикоподшипник


TECHNICAL DATA/DATOS TÉCNICOS/DONNÉES TECHNIQUES/ТЕХНИЧЕСКИЕ ДАННЫЕ

60Hz $n \approx 3500$ l/min

MODEL MODELO MODELE МОДЕЛЬ		DN	Power Potencia Puisseance Мощность			Q=Delivery/Caudal/Débit/Поддача											
						GPM 0	5	8	13.2	15.9	18.5	21.1	23.8	26.4	29.1	31.7	35.2
						m³/h 0	1.2	1.8	3	3.6	4.2	4.8	5.4	6	6.6	7.2	8
						l/min 0	20	30	50	60	70	80	90	100	110	120	133
1-ph	3-ph	mm	kw	hp		H=Head(m)/Altura(m)/Hauteur(m)/Общий напор в метрах водяного столба (м)											
FABm150	FAB150	40x25	1.1	1.5	Brass	62	54	50	40	34	28	21	14	-	-	-	-
FABm200	FAB200	40x25	1.5	2	Brass	64	59	56	50	46	42	36	31	24	16	-	-
FABm300	FAB300	40x25	2.2	3	Brass	66	62	59	54	51	48	44	40	36	30	25	16

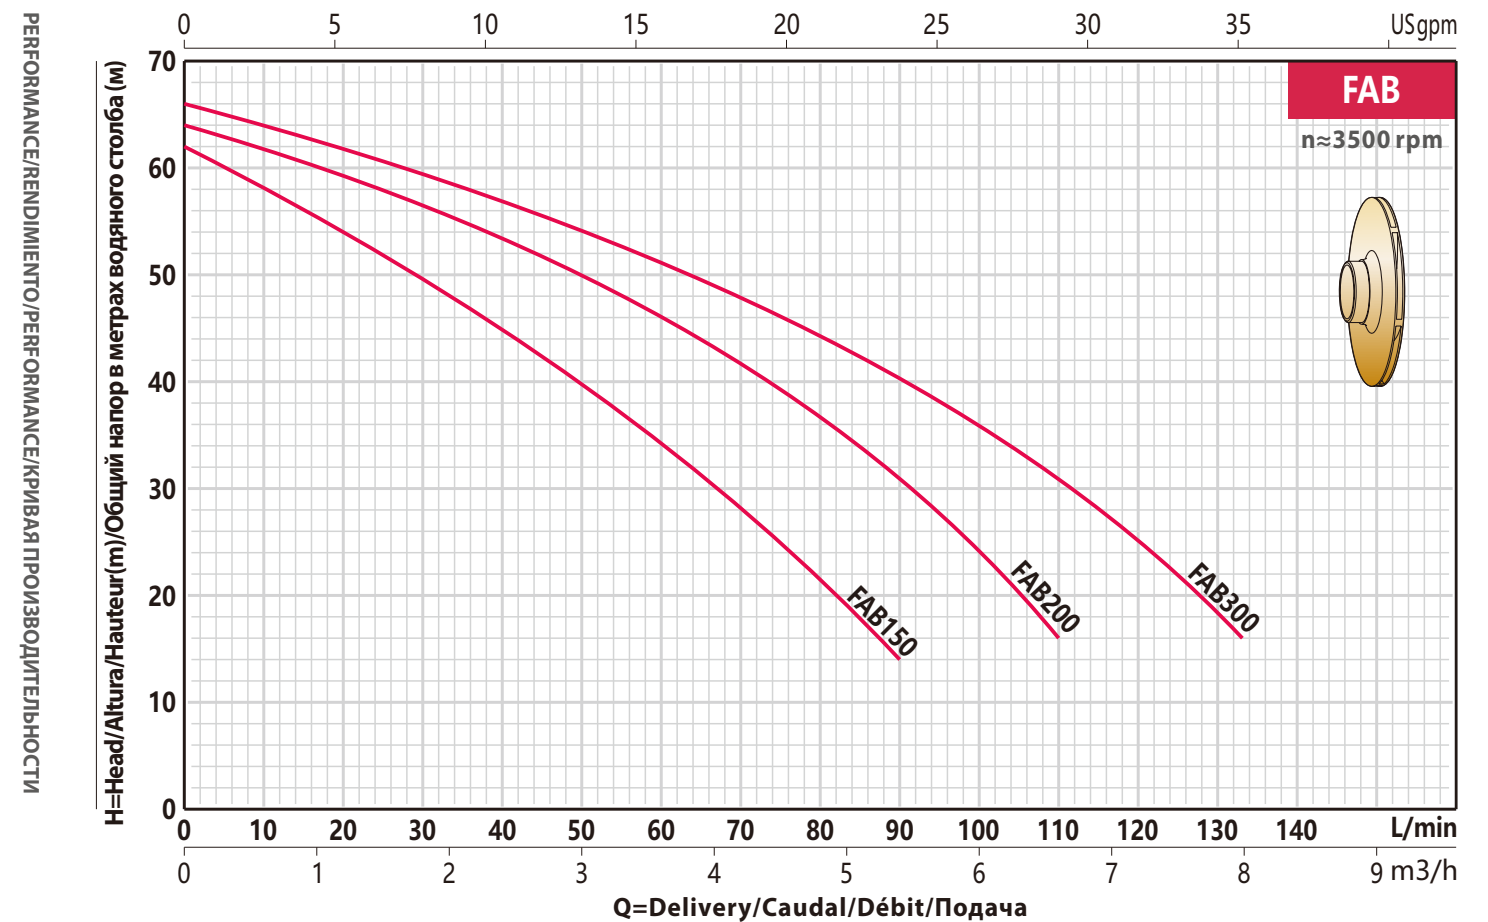

DIMENSIONS AND N.W./DIMENSIONES Y PESOS/DIMENSIONS ET POIDS/РАЗМЕРЫ И ВЕС

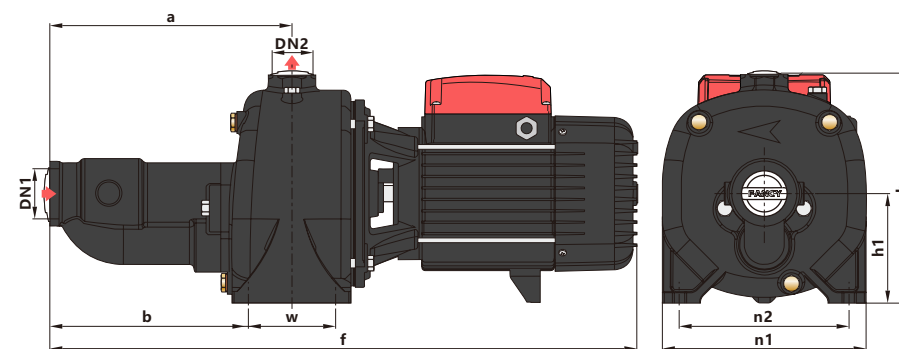

MODEL MODELO MODÈLE МОДЕЛЬ	DIMENSIONS/DIMENSIONES DIMENSIONS/РАЗМЕРЫ										GW
	mm										
	DN1	DN2	a	f	b	w	n1	n2	h	h1	
FAB150	40	25	260	625	208	102	219	178	240	115	30
FAB200	40	25	260	625	208	102	219	178	240	115	31
FAB300	40	25	260	645	208	102	219	178	240	115	32